

2 & 4 Megapixel  
H.265 Vandal Proof

# Network Dome IR Camera



S-D2SIP-F / S-D4SIP-F




### Key Features

- 0.008Lux Starlight
- Super WDR up to 120dB
- H.265 High Efficiency Video Coding
- Integrated Motorized Varifocal Lens(Auto Focus)
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Built-in efficient IR LEDs, IR distance up to 70m
- Weather-proof IP67-rated Housing
- Built-in 802.3af Compliant PoE
- Support ONVIF Profile S

### Supported Browser



### Dimension (mm)

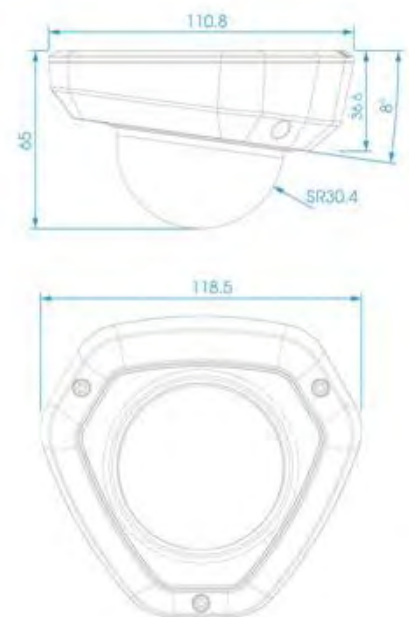

# IP Video Surveillance Solution

Specification	S-D2SIP-F	S-D4SIP-F	
<b>Camera</b>	Image Sensor	1/3" Progressive Scan CMOS	
	Min. Illumination	Color: 0.008Lux @F1.2, B/W: 0Lux with IR on	
	WDR	Super WDR up to 120dB	
	Lens	3.6mm @F1.6 (Optional 2.8mm)	
	Field of View	H74°(3.6mm)	
	Shutter Time	1/100000s~1/5s	
	IR Distance	Up to 30m	
	Day&Night	ICR Filter Auto Switch	
<b>Video</b>	Max Image Resolution	2592×1520	2592×1520
	Frame Rate	25fps(1920×1080),	20fps(2592×1520),
		25fps(1280×960),	25fps(2304×1296),
		25fps(1280×720),	25fps(1920×1080),
		25fps(704×576)	25fps(1280×960),
		25fps(1280×720),	25fps(1280×720),
25fps(704×576)	25fps(704×576)		
Video Compression	H.265(HEVC)/H.264/MJPEG		
Video Bit Rate	16Kbps~16Mbps(CBR/VBR Adjustable)		
Image Setting	Brightness/Contrast/Saturation/Sharpness		
<b>Network</b>	Ethernet	1*RJ45 10M/100M Ethernet Port	
	Network Storage	NAS(Support NFS, SMB/CIFS)	
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN	
<b>Audio</b>	Audio Streaming	Built-in Microphone	
	Audio Compression	G.711/AAC	
<b>System</b>	Storage	Support Micro SD/SDHC/SDXC, up to 64G	
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI	
	SIP/VoIP Support	Yes, Voice & Video-over-IP	
	Event Trigger	Motion Detection, Network Disconnection, etc.	
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ SIP Phone	
	System Compatibility	ONVIF Profile S	
<b>General</b>	Power Supply	PoE	
	Power Consumption	2.5W MAX, 5.5W MAX (With IR on)	
	Weather Proof	Up to IP67 Rating for Weather-resistant	
	Weight	500g	



| [www.secureye.com](http://www.secureye.com)

